

Exit sign module: GWD EXIT


The Guide-LITE GWD module provides visible way guidance. LED sets are enclosed in a polycarbonate envelope, for the installer to fit to the chosen extruded aluminium housing. Modules plug together using a series/ parallel circuit configuration. The system can be used in conjunction with high level conventional emergency lighting.

- Long life LED
- Snug fit into aluminium extrusions

Specification

Input voltage:	24V DC
Current:	20mA
Light source:	4 LED module, SMT
Extrusion material:	Fire retardant polycarbonate (>850 deg C), UV stabilised
Legend:	EXIT vertical form – green background
Dimensions LW (mm):	260 x 15

Product code	Description
GWDH/IND7/3	Module, vertical EXIT, green background, 260mm

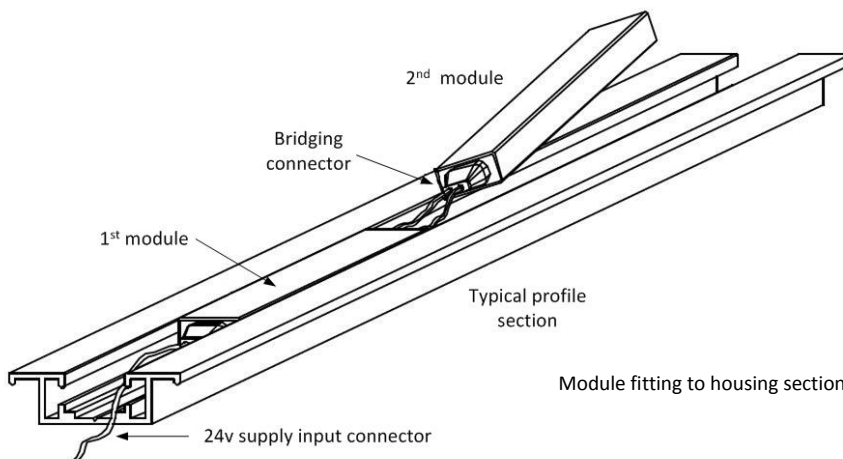

The content of this Thomas & Betts specification sheet has been checked carefully for accuracy at the time of print. However, Thomas & Betts does not give any warranty of any kind, express or implied, in this respect and shall not be liable for any loss or damage that may result from any use or as a consequence of any inaccuracies in or any omissions from the information which it may contain. We reserve the right to modify, update products as part of our policy of continuous product development. E&OE.