


## Power supply assemblies

GPS Guide-Lite power supplies, with rated outputs for 24v DC operation, are available for either 220v or 120v mains supplies. Models are available for either normal or emergency operation.

### XLV24100

This is a charger unit with a mains monitoring circuit and changeover device set.

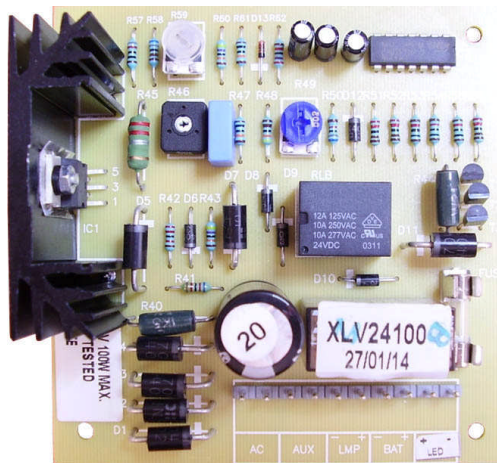

#### Specification

Charger input voltage:	24v AC
Output voltage:	27.6v
Charger max. output current:	2A
Batteries:	For use with 2 x 12v24Ah VRLA batteries wired in series
Indicators – remote:	Remote green LED for charge healthy
Input/ output:	
Maintained input voltage:	24v DC
Output voltage:	24v DC
Battery fusing:	6.3A quick blow, 5x20mm
Connections:	Plug on screw terminal connector
Dimensions:	PCB: 102 x 102 mm
Fixings:	4 x 4mm fixing holes available
Fixing centres:	87 x 87mm

Dimensions and weights are nominal.

To order		NATO stock number
XLV24100	Charger 24v, 100w with mains monitoring and changeover module for a GPS2206.5 power supply.	